

Instructions LOXX[®] Connector

1.



Front side Connector.

2.



Remove upper part of protective foil on the back side.

3.



Fold.

4.




Press together.

5.



Pull though, sticky surface inwards.

6.

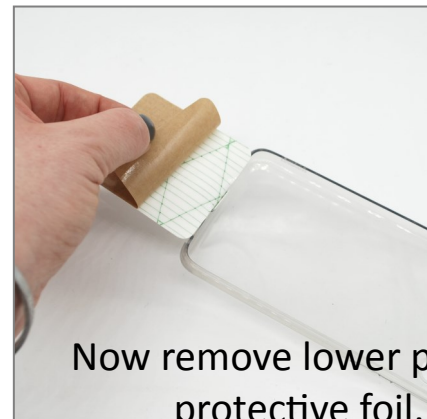

Now remove lower part of protective foil.

7.



Press together.

8.



Put upper part though eyelet.

Instructions LOXX[®] Connector

9.



Screw washer on tightly.

10.



Alternatively, you can also glue the LOXX[®] connector to the outside of your phone case.

